


CVGS Cork Spacer / Bobbins Lisec

Stock No. WT00005; WT00006; WT00876; WT01079; WT01122; WT01112; WT00871

Technical Data Sheet

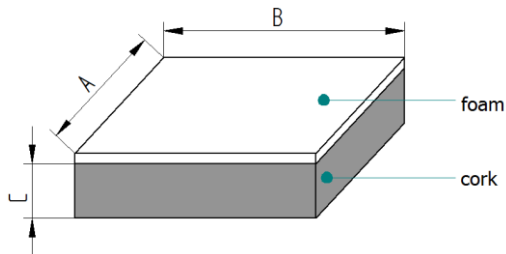

Parameters (*):

Adhesion parameter

Description

White self adhesive foam is a kind of a adhesive layer with a very good adhesion to glass.

It's easy removable from glass, wood, PVC, metal and other smooth surfaces.

This product may leave the delicate marks on the glass, after prolonged storage which is easily removable with cleaning liquids for example: isopropanol.

Due to the characteristics of the wending beam is possible variations of thickness foam.

Cork parameters

Cork pad parameters

Parameter	Unit	Value	Norm
Recovery*	%	≥ 65	ISO 7322
Compression*	%	20 – 40	ISO 7322
Thickness	mm	+/- 0,4	EN 1904
Size tolerances	mm	±/- 1	EN 1904
Quantity	psc	2 %	EN 1904

Storage recommendations

Storage in temperature between 18 and 30°C at 50% relative humidity. Under these conditions the products may be kept for up to six months in its original packing protected in sunlight.

Comments

Before use remove the foil from the foam.
After unwinding the roll (before use) do not leave foam to the exposed to: dust, UV - it may have a negative effect on the adhesive properties of the foam.

Packaging

Packaging: One pallet / 5 rows of 6 rolls / 30 rolls on the pallet
Information about quantities are on labels on each carton box.
The package may contain some amounts of spacers out of size tolerance.

Additional information

The above data are only for information and do not involve any guarantee. As our products are used for many purposes, we recommend our Customers to do their own tests to determine the suitability of our products for their purposes and applications.
If you need further information about product safety, conformance, REACH or RoHS please send your e-mail quality.control@cvgs.pl

Waste generated after use of the product should be collected by authorized disposal plants of waste - waste code 03 01 01.

(*) Based of sample 3 mm
The above data are only for information and do not involve any guarantee. As our products are used for many purposes, we recommend our Customers to do their own tests to determine the suitability of our products for their purposes and applications.